



AUSSIE TRAVELLER

Curved Roof Rafter

Made to our exclusive design curve and shape the Curved Roof Rafter (CRR) was developed to help overcome two of the problems users of roll out awnings face.

1. It helps prevent wind flap in the fabric of the awning,
2. It reduces water retention in rain.

The Curved Roof Rafter is particularly effective when used in conjunction with our Anti Flap Kit, with or without the addition of walls.



RAFTER RETRACTED FOR TRAVEL



FIT POLE END INTO WALL BRACKET FIXED TO SIDE OF VAN



EXTEND OUT FRONT TELESCOPIC SECTION AND FIT SPIGOT INTO HOLE IN ROLLER



FITTED IN CONJUNCTION WITH ANTI FLAP KIT AND WALLS



SHOWS CURVED ROOF RAFTER IN POSITION


SUGGESTED USAGE

<u>Awning Size</u>	<u>Number of Rafters</u>
11' and under	1
12'	1 (2)
13'	2
14'	2
15'	2
16'	2
17'	2 (3)
18'	3
19'	3
20'	3
21'	3 (4)
22' and over	4


NB. Various brands of awnings use different vinyl fabrics which may be susceptible to some stretch when placed under tension from the Curved Roof Rafter. Aussie Traveller takes no responsibility for any fabric deformity caused by the use of the Curved Roof Rafter.

Curved Roof Rafter Fitting Instructions

Awning Fabric

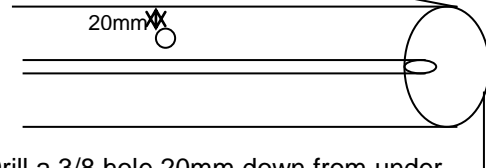

Drill a 3/8 hole 20mm down from under side of fabric.

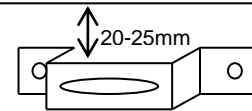

Awning Fabric