




Compatible with CPP 15 Portable Power Packs Only

- ① DC Connector (Vehicle, Fixed Wired)
- ② DC Connector (Power Pack, Fixed Wired)
- ③ Bi-Coloured Status Indicator
 - Green = ON / Charged
 - Red = Charging
 - Flashing Red = Error

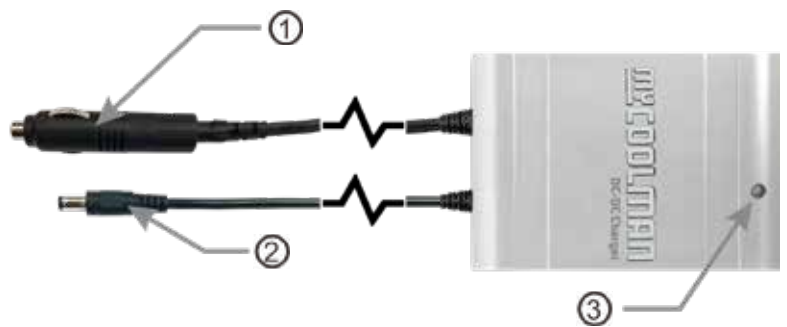

Features

- Magnetic Mounting Pads
- Automatic Start-Up and Shutdown
- Automatic Low Voltage Protection

Benefits

- Charges Power Pack on the go
- Charging time 0-100%, 5-6 hours
- Ready to activate your **MYCOOLMAN** at your next remote destination



SPECIFICATIONS

Input Voltage & Current

DC12V	9.5-17V
DC24V	21.5-31.5V
Max Current	6A

Output Voltage & Current

Output Voltage (Open)	<17.5V
Output Voltage (Load)	11-16.8V
Output Current	3A

LED (Status)

1. LED **Green** (Energised / Fully Charged) - LED **Red** (Charging)
2. LED **Red** Flash Error Code (4 Seconds Intervals)

Flash Count

Error Type

1x	Low Input Voltage
2x	Over Temperature
3x	Output Short Circuit
4x	Output Over Current

Warranty

12 Months

*Operation above 43°C is possible, however higher temperatures may increase current draw (Ah) and reduce refrigerator performance.



mycoolman.com.au

