


GH6000EH 7.5kVA HONDA

7.5kVA
HONDA
GH6000EH

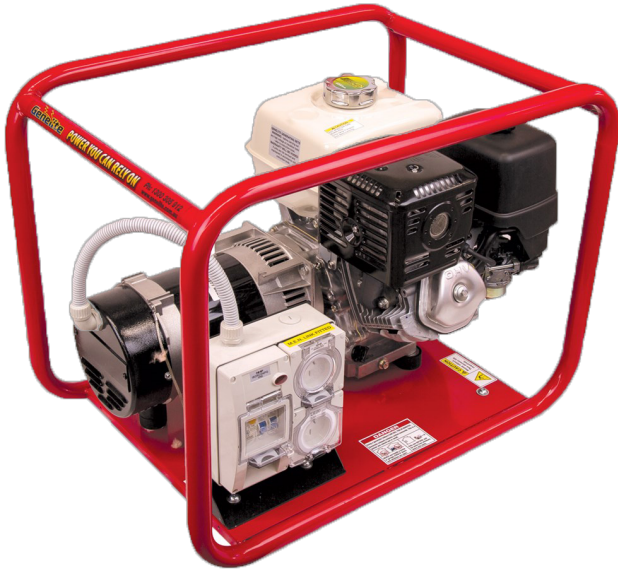

ENGINE

| | |
|----------------------------|--------------------------------|
| MANUFACTURER | Honda |
| ENGINE MODEL | GX390E |
| TYPE & CYLINDER | O.H.V. |
| STARTING | Recoil & Electric Start |
| RUN TIME | 2.6hr @ 100%, 3.8hr @ 60% load |
| FUEL | Unleaded Petrol |
| CUBIC CAPACITY | 389 cm ³ |
| HP 3000 RPM CONT | 8HP |
| OIL CAPACITY | 1.1L |

TECHNICAL

| | |
|----------------------|----------|
| MODEL | GH6000EH |
| TYPE | Portable |
| FREQUENCY | 50Hz |
| PHASE/VOLTAGE | 1/240 |

| SPEED | POWER | | NOISE LEVEL | FUEL CAPACITY | CONTINUOUS OUTPUT |
|---------|-----------|-----|-------------------|---------------|-------------------|
| | Max Power | | dBA @7m see *1 | | |
| | kW | kVA | dBA | | |
| 3000RPM | 6.0 | 7.5 | 72 | 6.1L | 7.5kVA |

ADDITIONAL INFO

| | |
|----------------|---|
| OUTLETS | IP66 rated 10amp + 15 amp switched with ELCB & RCD |
| FRAME | Extra large roll frame |

DIMENSIONS

| | |
|---------------|------|
| LENGTH | 85cm |
| WIDTH | 57cm |
| HEIGHT | 60cm |
| WEIGHT | 56kg |

ALTERNATOR

| | |
|----------------------------|--------------|
| ALTERNATOR BRAND | Mecc Alte |
| TYPE | Brushless |
| HARMONIC DISTORTION | Less than 5% |
| INSULATION CLASS | Class H |

OPTIONS

- 2 or 4 wheel kit
- Long Range Tank (15l capacity)
- Oversized, Single or 3 phase alternators